



Hinged Unit (HHU)


Our most discreet secondary glazing product, featuring single handle operation and multi-point locking. Side and base opening is available, plus there's a tilt and turn facility for easy maintenance.

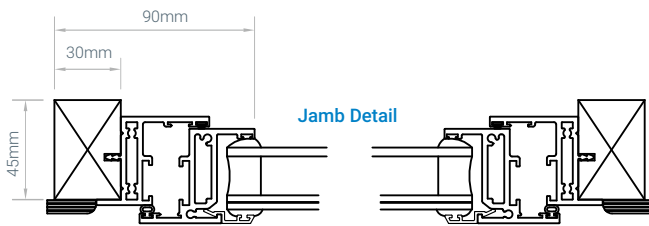

Head Detail

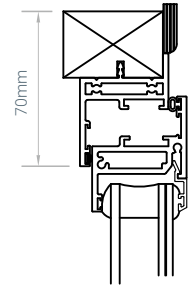

Cill Detail



Features

- Slim, unobtrusive aluminium profile
- Easy opening due to internal gearing
- Multi-point locking for enhanced security
- Improved noise and thermal installation
- Suitable for arched and shaped applications
- Suitable to have bevelled timber subframe to fix into bays /splayed reveals
- Can be coupled or stacked with other units in the range to treat large areas of glazing or long runs of windows
- Can be supplied with restrictors

Specification


- Glazing options: 4mm – 28mm (including double glazed sealed unit)
- Choice of timber subframes
- Pre-drilled and countersunk to suit either face fix or reveal fix
- Q-Lon seal to front, Woolpile seal to back
- Gasket colour option of black or white
- PVCu trims supplied for the face of the units to create a neat, clean finish
- Standard colour white high gloss – RAL 9910

Variations of Basic Unit

- Various handle and hinge options
- Tilt & Turn, Anti Ligature and Double Hinged (DHHU) options
- Standard and acoustic trickle vents are available
- No subframe version available
- Can be coupled and stacked using a heavy duty frame coupling section or timber to timber
- LH, RH, top or bottom orientation
- Variety of stock colours available, including all RAL options
- Can accept flyscreen mesh

Heritage

Configurations:

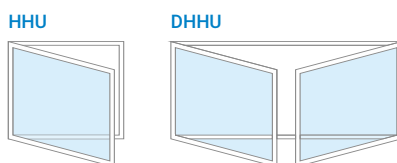

Max width:	1,500mm	3,000mm
or Max height:	3,000mm	3,000mm



Optimum Noise Reduction: 54dB (Rw)

Using 10.8mm acoustic laminate glazing, with 200mm glass-to-glass



Optimum U Value: 0.97 W/m²K

Using 28mm double glazed sealed unit, with 80mm glass-to-glass