
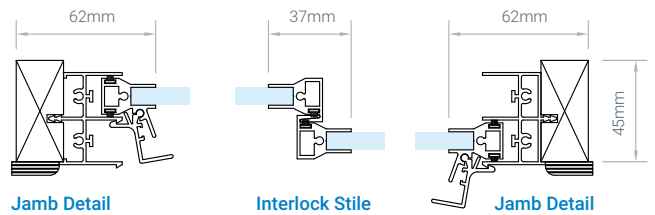


## Horizontal Slider

A slim and versatile horizontal sliding system that provides easy access for cleaning and ventilation, and is suitable for treating most window types. Available with 2, 3, 4 or 5 sliding sashes (panels).

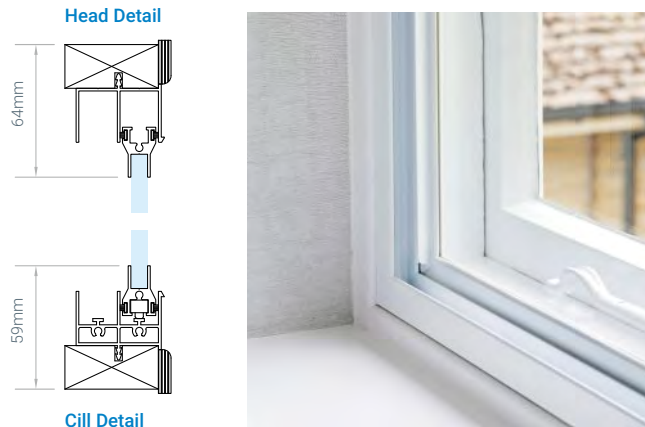

### Features

- Slim, unobtrusive aluminium profile
- Smooth sliding action on panels for easy operation using brass wheels
- All panels lift out for complete access to primary window
- Improved noise and thermal installation
- Suitable to have bevelled timber subframe to fix into bays /splayed reveals
- Can be coupled or stacked with other units in the range to treat large areas of glazing or long runs of windows
- Available in right hand (RH) or left hand (LH) orientation

### Specification

- Glazing options: 4mm – 6.8mm
- Choice of timber subframes
- Pre-drilled and countersunk to suit either face fix or reveal fix
- Woolpile inserted into panel section groove to create outer frame seal
- Gasket colour option of black or white
- PVCu trims supplied for the face of the units to create a neat, clean finish
- Standard colour white high gloss – RAL 9910

### Variations of Basic Unit

- Locking and non-locking fit lock available to secure panels (fitted to the interlock sections)
- Standard and acoustic trickle vents are available
- Can be coupled and stacked using a heavy duty frame coupling section or timber to timber
- Unit available with no subframe
- Larger trims and timber trims available at additional costs
- Variety of stock colours available, including all RAL options
- Can accept flyscreen mesh



#### Optimum Noise Reduction: 52dB (Rw)

Using 6.4mm acoustic laminate glazing, with 200mm glass-to-glass




#### Optimum U Value: 1.868 W/m<sup>2</sup>K

Using 4mm toughened Low E glazing, with 80mm glass-to-glass


#### Traditional

##### Configurations:


#### SS2




#### CO3 (Centre Opening)




#### SS3



#### SS4



#### SS5



Max width:

2,400mm

3,600mm

3,600mm

4,900mm

4,900mm

or Max height:

2,000mm

2,000mm

2,000mm

2,000mm

2,000mm