



Lift Out (LO)


A removable panel within its own outer frame, fixed to the face or reveal of the existing window. These units use an aluminium twin track profile, to provide a secure fixing for larger panes of glass.

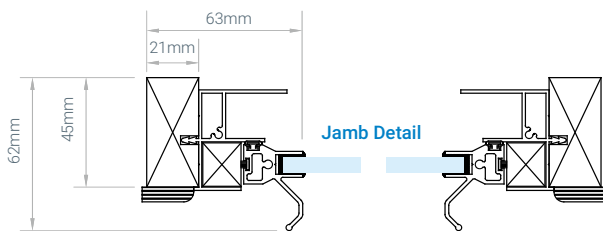

Head Detail

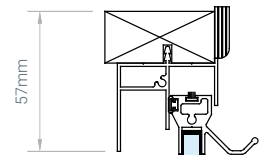

Cill Detail

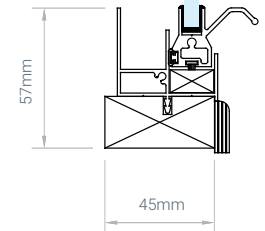

Features

- Slim, unobtrusive aluminium profile
- Economical option to secondary glaze primary window
- Improved noise and thermal installation
- Suitable for arched and shaped applications
- Suitable to have bevelled timber subframe to fix into bays /splayed reveals
- Can be coupled or stacked with other units in the range to treat large areas of glazing or long runs of windows
- Easy to remove panel for cleaning and maintenance of primary window

Specification

- Glazing options: 4mm – 6.8mm
- Choice of timber subframes
- Pre-drilled and countersunk to suit either face fix or reveal fix
- Woolpile inserted into panel section groove to create outer frame seal
- Gasket colour option of black or white
- PVCu trims supplied for the face of the units to create a neat, clean finish
- Standard colour white high gloss – RAL 9910
- Lift out section has one rib running along the section

Traditional Configurations:



Max width:	2,000mm	2,000mm
or Max height:	2,200mm	2,200mm

Variations of Basic Unit

- Yale bolt is available to secure panel in place (fitted through subframe)
- No Subframe version available
- Slimline option available
- Standard and acoustic trickle vents are available
- Can be coupled and stacked using a heavy duty frame coupling section or timber to timber
- Larger trims and timber trims available at additional costs
- Variety of stock colours available, including all RAL options
- Can accept flyscreen mesh
- Curved in plan option available



Optimum Noise Reduction: 52dB (Rw)

Using 6.4mm acoustic laminate glazing, with 200mm glass-to-glass



Optimum U Value: 1.868 W/m²K

Using 4mm toughened Low E glazing, with 80mm glass-to-glass